Primo Kamado Grill Assembly Instructions

Two Adults are Needed to Assemble the Grill. Tools Needed: Box Cutter, Phillips Screwdriver, 7/16" Wrench.

IMPORTANT: DO NOT LIFT GRILL BY THE HINGE WHEN INSERTING INTO CRADLE

When the Primo Kamado Grill arrives, select a level area with plenty of working space such as a driveway or parking lot.



Open the top of the box, remove the two main cradle parts and set them aside. Note: one has a notched top bar.



Remove the two side tables and set them aside. Remove the two "Z" shaped cardboard inserts and discard.




Use a box cutter and cut vertically down one of the corners. Firmly pull away the four cardboard sides and discard.



5 Open the grill and remove the ash tool, grate lifter, owners manual and the cradle hardware package.



6 Insert the cradle part with the notched top bar horizontally then turn upright to form an "X" shape and align holes.



Insert the Phillips head screw through the two bottom bars. Use a locking washer, then nut. Tighten with wrench.



Align the metal crossmember bar with the holes and use the remaining flat head screws and nuts. Tighten with wrench.




B Insert a flat head screw into the two top bars. Use a locking washer and one of the nuts. Tighten with wrench.



10 Align the cradle with the grill. Make sure the locking casters are locked and the furthest from the grill.



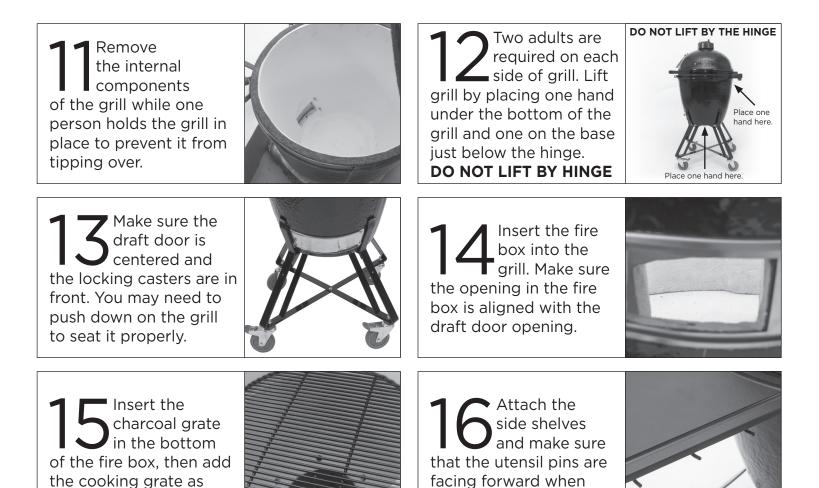

Final Notes After Assembly

shown in the photo.

- When moving the grill carefully pull when moving. **Never push grill to prevent the potential of it tipping it over.**
- When the grill is in the desired location, push down the tabs on the locking casters to set the locks.



3289 Montreal Industrial Way Tucker, GA 30084 770-492-3920

www.PrimoGrill.com



standing in front of grill.