









Designed and manufactured by the company that brings you Fire Magic[®] Premium Grills, AOG[®] grills add style and cooking excellence to your outdoor kitchen.

Whether Built-In or Portable, you'll be delighted with the performance and appearance of your American Outdoor Grill®

FEATURE HIGHLIGHTS



SEAMLESS HOOD AND CONTROL PANEL WITH BRUSHED EDGES




304 STAINLESS STEEL BURNERS



BUILT-IN INFRARED BACKBURNER



VAPORIZER PANELS



"RAPID LIGHT" IGNITION ("T" SERIES)



TAINLESS STEEL ROD COOKING GRIDS



ANALOG THERMOMETER WITH POLISHED BEZEL



ON/OFF LIGHT CONTROL BUTTON ("L" SERIES)



ELECTRONIC IGNITION
PUSH BUTTON ("L" SERIES)



("L" SERIES)

- → Heavy duty 304 series stainless steel construction
- Advanced high-quality 304 series stainless steel burners
- ♦ Stainless steel vaporizer panels for even heat distribution
- Heavy gauge, seamless oven hood and control panel with brushed edges
- Heavy duty 304 stainless steel cooking grids
- Backburner with high performance rotisserie kit (not available on -00SP)
- Halogen interior lights ("L" series only)
- ★ Electronic push button ignition ("L" series only)
- ♦ 120 Volt power source required for "L" series grills

- "Rapid Light" piezo ignition system, no power or batteries required ("T" series only)
- Large Analog thermometer with polished bezel reads up to 1000° F
- Heavy duty warming rack included with all units
- Flush mounted brass side burner on Portable Grills 12,000 BTU's
- ↑ 10" easy-to-use stainless steel drip tray
- LP conversion orifices included with Built-In and Post Grills
- Louvered on sides of firebox for even temperatures
- Easy cushion lid bumpers (front and back)

"L" SERIES GRILLS

The "L" series grills feature an electronic push button ignition system and interior halogen lights (controlled by a push button located on the right side of the unit) ideal for night grilling. Requires 120 Volt AC power.



Model Shown: 24NBL

Primary Cooking Surface:	432 sq. inches	
BTU's:	32,000 Primary + 10,000 Backburner	
Cut-out:	24½"w x 19½"d x 8½"h	



Model Shown: 30NBL

Primary Cooking Surface:	540 sq. inches	
BTU's:	45,000 Primary + 10,000 Backburner	
Cut-out:	30¾"w x 19½"d x 8½"h	





Model Shown: 36NBL

Primary Cooking Surface:	648 sq. inches
BTU's:	50,000 Primary + 12,000 Backburner
Cut-out:	37"w x 19½"d x 8½"h



HALOGEN LIGHTS Included with all "L" series grills



Pictured above: DC790-CBR-108SM Island, 36NBL Grill, REF-20 Refrigerator, & 3282L Double Side Burner

"RAPID-LIGHT" Push-to-light piezo ignition system



Model Shown: 36NBT

Primary Cooking Surface:	648 sq. inches
BTU's:	50,000 Primary + 12,000 Backburner
Cut-out:	37"w x 19½"d x 8½"h

"T" SERIES GRILLS

The "T" series grills feature a push-to-light piezo ignition system that eliminates the need for electricity or batteries. This results in a self sufficient grill with a clean looking front panel.



Model Shown: 24NBT

Primary Cooking Surface:	432 sq. inches	
BTU's:	32,000 Primary + 10,000 Backburner	
Cut-out:	24½"w x 19½"d x 8½"h	



Model Shown: 30NBT

Primary Cooking Surface:	540 sq. inches
BTU's:	45,000 Primary + 10,000 Backburner
Cut-out:	30¾"w x 19½"d x 8½"h

"L" SERIES GRILLS

The "L" series grills feature an electronic push button ignition system and interior halogen lights (controlled by a push button located on the right side of the unit) ideal for night grilling. Requires 120 Volt AC power.



Primary Cooking Surface: 432 sq. inches

32,000 Primary + 10,000 Backburner + 12,000 Side Burner BTU's:



Primary Cooking Surface: 540 sq. inches 45,000 Primary + 10,000 Backburner BTU's: + 12,000 Side Burner





Primary Cooking Surface: 648 sq. inches 50,000 Primary + 12,000 Backburner

BTU's: + 12,000 Side Burner



HALOGEN LIGHTS Included with all "L" series grills



Pictured above: 30PCL Portable Grill

"RAPID-LIGHT" Push-to-light piezo ignition system



Primary Cooking Surface: 648 sq. inches

50,000 Primary + 12,000 Backburner + 12,000 Side Burner BTU's:

"T" SERIES GRILLS

The "T" series grills feature a push-to-light piezo ignition system that eliminates the need for electricity or batteries. This results in a self sufficient grill with a clean looking front panel.



Primary Cooking Surface: 432 sq. inches

32,000 Primary + 10,000 Backburner + 12,000 Side Burner

BTU's:



Primary Cooking Surface: 540 sq. inches 45,000 Primary + 10,000 Backburner + 12,000 Side Burner BTU's:

POST MODEL COLLECTION


Designed for condos, apartments, or anywhere space is at a premium. The American Outdoor Grill® In-Ground and Patio Post Mount units pack a lot of grilling enjoyment into smaller spaces (432 square inches). The In-Ground Grill models must be cemented into the ground. Pedestal models may be bolted to a deck or concrete slab. Both feature a backburner, warming rack and dual side shelves (standard). The optional stainless steel tank shield is designed to conceal the unsightly propane tank while a safety chain keeps the tank securely in place.

Both grill versions are available as "L" series with lights and electronic ignition and "T" series with "Rapid Light" piezo ignition system.



& TANK SUPPORT

Pictured above: 24PPT Pedestal Grill with optional Tank Shield

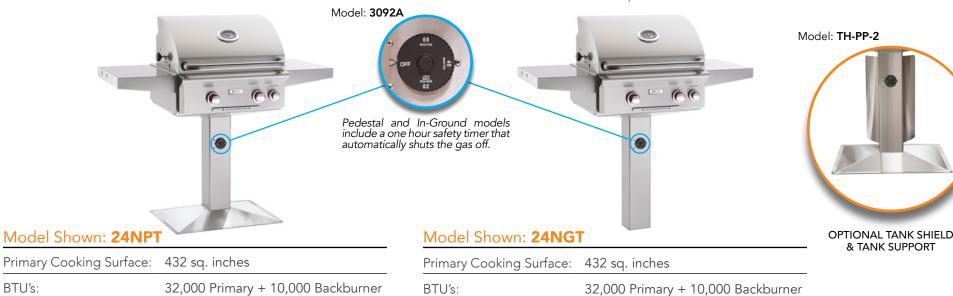

BTU's:

Pictured above: DC790-CBR-108SM Island, 36NBT Grill, REF-20 Refrigerator, & 16-39-SSD Double Access Door

ISLAND SYSTEMS

Constructed from durable Glass Fiber Reinforced Concrete (GFRC) and easily assembled on site, these Island Systems are designed specifically for AOG® grills. These 5-piece systems include a Café Blanco island base with a contrasting polished Smoke counter top.

Model #: **DC790-CBR-108SM**

Dimensions	107"wide x 35"deep x 36"high
Product Requirements	 36NBL (T) grill + AD-36C adapter REF-20 Refrigerator 3282L (T) Double side burner + 3282-AD 16-39-SSD Front Double Access Door 20-14-SSDR/DL(DRV/DLV) Side Door

System also available with Double Drawer (16-15-DSSD) instead of Refrigerator. Model #: DC790-CBD-108SM

Model #: DC430-CBR-75SM

Dimensions	76"wide x 35"deep x 36"high
Product Requirements	 24NBL (T) grill + AD-24C adapter REF-20 Refrigerator 14-20-SSDR/DL Front Single Access Door 20-14-SSDR/DL(DRV/DLV) Side Door

System also available with Double Drawer (16-15-DSSD) instead of Refrigerator. Model #: DC430-CBD-75SM



ACCESSORIES



AOG® REFRIGERATOR

Model:	REF-20
Cut-out:	20"w x 22"d x 34½"h

4.2 cubic foot. Interior light and security lock and key. Reversible door hinge. When used outdoors, it must be installed in an enclosure.



DOUBLE SIDE BURNER

Model:	3282T/L (P)	
Cut-out:	11½"w x 22¾"d x 8½"h	

Enjoy precise flame control on each burner to prepare side dishes and sauces for you meal. Choose from electronic push button (L) or push-to-light (T) ignition systems. Comes with two 12,500 BTU's burners, stainless steel rod grid, and stainless steel cover.



INFRARED BURNER ("L" Series Only)

Mode	·	IRB-18
MIOGE		1110-10

Option for all "L" Series Grills replacing the left standard burner. It uses infrared heat to lock-up juices for tender meat and full flavor. Perfect for an amazing seared steak. (Also available as a factory-installed upgrade)



PORTABLE GRILL COVERS

Description	Model
24" Cover for Portable Grill	CC24-C
30" Cover for Portable Grill	CC30-C
36" Cover for Portable Grill	CC36-C



BUILT-IN GRILL COVERS

Description	Model
24" Cover for Built-In Grill	CB24-C
30" Cover for Built-In Grill	CB30-C
36" Cover for Built-In Grill	CB36-C



SINGLE SIDE BURNER

Model:	3283 (P)
Cut-out:	8¾"w x 14¼"d

Drops into any custom grill island. Sized for sauce and sauté pans. Cooking or reheating side dishes or sauces is quick and easy with a 15,000 BTU's burner.



STAINLESS STEEL GRIDDLE

Mode	l:	GR1
------	----	-----

The new AOG® Stainless Steel Griddle features a 304, 12 gauge stainless steel construction, removable drip tray and scratch resistant surface. This unique grilling accessory heats up fast and allows you to cook all your meals in your outdoor kitchen.

Additional AOG® Accessories (not pictured)

Portable propane to natural gas Conversion Kit Insulating Liner (Specify Size)* Adapters for Grills (Required for Island Systems) Adapter for Double Side Burner (Required for DC790 Island) Rotisserie Kit	CK-1-NAT 24-IL-B, 30-IL-B, 36-IL-B AD-24C or AD-36C
Adapters for Grills (Required for Island Systems) Adapter for Double Side Burner (Required for DC790 Island) Rotisserie Kit	
Adapter for Double Side Burner (Required for DC790 Island) Rotisserie Kit	AD-24C or AD-36C
Rotisserie Kit	
	3282-AD
	RK-24, RK-30, RK-36
Smoker Box	3561
Grill Light	3574
Grill Light Bracket (needed for -00SP models)	24-B-28

^{*}Grill island cut-outs change when using insulating liner

DOORS & DRAWERS



FEATURE HIGHLIGHTS

- Stainless steel tubular handles
- 304 s.s. double wall construction
- Cut-out is height x width x depth
- Most doors can be ordered for either right or left access




SINGLE ACCESS DOOR*

Model: 24-17-SSDR OR DL Cut-out: 25" x 17½"



DOOR W/DOUBLE DRAWER

Model: 18-30-SSDD Cut-out: 18½" x 30" x 26"





SINGLE ACCESS DOOR*

Model: 17-24-SSDR OR DL Cut-out: 18" x 241/2"



DOOR W/DOUBLE DRAWER & PLATTER STORAGE

Model: 18-36-SSDD Cut-out: 18½" x 36½" x 26"

Single Access Door

20-14-SSDR OR DL

21" x 141/2"



DOUBLE ACCESS DOOR *

Model: 20-30-SSD

Cut-out: 21" x 30"

MASONRY DRAWER

Single Access Door

14-20-SSDR OR DL

15" x 201/2"

Model: 13-31-SSD Cut-out: 13" x 31" x 201/2"



SINGLE ACCESS DOOR WITH TANK TRAY AND LOUVERS

Model: 20-14-SSDRV OR DLV Cut-out: 21" x 14½" x 20½"



DOUBLE DRAWER

Model: 16-15-DSSD Cut-out: 16" x 14½" x 20½"



FEATURE HIGHLIGHTS

- 304 stainless steel construction
- Black Slam latch handle
- Single wall construction
- Cut-out is height x width x depth
- Single Access Doors also available in black powder coat finish
- Most doors are reversible for left or right access



DOUBLE ACCESS DOORS

Model: 20-30-SD Cut-out: 201/2" x 30"



SINGLE ACCESS DOOR

Model: 24-17-SD Cut-out: 24½" x 17½"



SINGLE ACCESS DOOR

Model: 17-24-SD Cut-out: 17½" x 24½"



SINGLE ACCESS DOOR

Model: 20-14-SD Cut-out: 20½" x 14½"



Double Access Door

16-39-SSD 16" x 39"

SINGLE ACCESS DOOR

Model: 14-20-SD Cut-out: 14½" x 20½"



SINGLE ACCESS DOOR

Model: 18-12-SD Cut-out: 18½" x 12½"



SINGLE ACCESS DOOR

Model: 12-18-SD Cut-out: 12½" x 18½"



SINGLE ACCESS DOOR WITH

Model: 20-14-SDV

Cut-out: 20½" x 14½"







Rev. 0 - 1612161030